

P R O D U C T I N F O R M A T I O N

## Bituthene® Primer WP-3000

Easy-to-use, water-based primer for use with Bituthene membranes and Grace underlayments

### Description

Bituthene® Primer WP-3000 is a water-based latex primer which is specifically formulated to bind dust and concrete efflorescence, thereby providing a suitable surface for Bituthene membranes. Bituthene Primer WP-3000 promotes good initial adhesion and, more importantly, excellent permanent adhesion of Bituthene membranes.


The VOC (Volatile Organic Compound) content is 110 g/L and it meets the U.S. E.P.A. Volatile Organic Compound Emission Standards for Architectural Coatings.

Architectural and Industrial Maintenance Regulations limit the VOC content in products classified as Architectural Coatings. Refer to Technical Letters at [www.graceconstruction.com](http://www.graceconstruction.com) for most current list of allowable limits.

### Use

Bituthene Primer WP-3000 is used to prime all structural concrete, masonry or wood surfaces on which Bituthene membranes will be applied.

Bituthene Primer WP-3000 is used for vertical and horizontal applications at 5°C (40°F) or above.

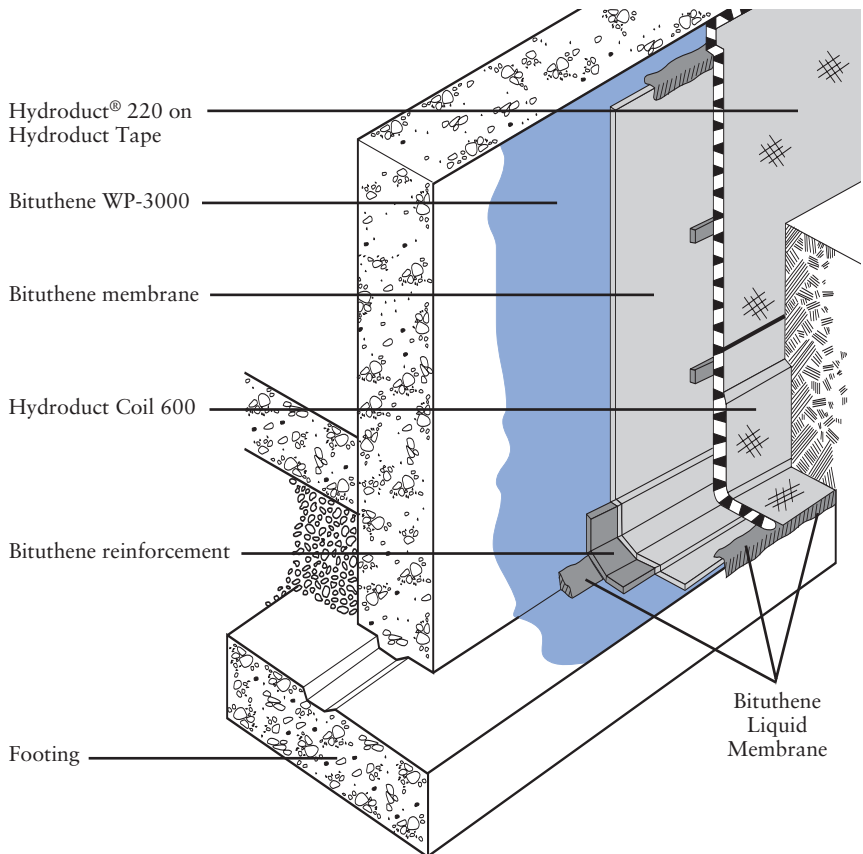

## Supply

Product	Unit Size	Weight	Units per Pallet	Coverage
Bituthene Primer WP-3000	18.9 L (5 gal) pail	20 kg (44 lbs)/pail	24 pails	12-15 m <sup>2</sup> /L (500-600 ft <sup>2</sup> /gal)

## Application Procedures

### Safety, Storage and Handling Information

Bituthene products must be handled properly. Vapors from solvent-based primers and mastic are harmful and flammable. Grace Protection Board Adhesive is extremely flammable. For these products, the best available information on safe handling, storage, personal protection, health and environmental considerations has been gathered. Material Safety Data Sheets (MSDS) are available at [www.graceconstruction.com](http://www.graceconstruction.com) and users should acquaint themselves with this information. Carefully read detailed precaution statements on product labels and the MSDS before use.

### Application

Bituthene Primer WP-3000 is packaged ready to use. Do not dilute with water or solvent. Apply by spray or roller. For best results use a professional grade, pump-type compressed air sprayer with a brass fan tip nozzle.

Apply the primer to clean surfaces at a coverage rate of 12-15 m<sup>2</sup>/L (500-600 ft<sup>2</sup>/gal). Coverage should be uniform. Primer should not be applied so heavily that it puddles or runs. Do not apply directly to Bituthene membrane.

Allow the primer to dry one hour. In humid conditions, dry time may be longer. In general, priming should be limited to what can be covered in 24 hours. In conditions where long dry times are expected, substrates may be primed in advance. Substrates should be reprimed if significant dirt or dust accumulates. Before primer dries, tools should be cleaned with water. After primer dries, tools should be cleaned with mineral spirits. Mineral spirits is a combustible liquid which should be used only in accordance with manufacturer's safety recommendations. **Do not use solvents to clean hands or skin.**

**For Technical Assistance call toll free at 866-333-3SBM (3726).**



Visit our web site at [www.graceconstruction.com](http://www.graceconstruction.com)



W. R. Grace & Co.-Conn. 62 Whittemore Avenue Cambridge, MA 02140

Bituthene and Hydroduct are registered trademarks of W. R. Grace & Co.-Conn.

We hope the information here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us. No statement, recommendation or suggestion is intended for any use which would infringe any patent or copyright. W. R. Grace & Co.-Conn., 62 Whittemore Avenue, Cambridge, MA 02140. In Canada, Grace Canada, Inc., 294 Clements Road, West, Ajax, Ontario, Canada L1S 3C6.

These products may be covered by patents or patents pending.

Copyright 2005. W. R. Grace & Co.-Conn.

BIT-136D

Printed in USA

6/05

FA/LI/1M

**GRACE**  
Construction Products